

University of Groningen

## Integrated Dimensionality Reduction and Sequence Prediction using LSTM

Okafor, Emmanuel; Schomaker, Lambertus

**IMPORTANT NOTE:** You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.

*Document Version*

Publisher's PDF, also known as Version of record

*Publication date:*

2018

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Okafor, E., & Schomaker, L. (2018). *Integrated Dimensionality Reduction and Sequence Prediction using LSTM*. Poster session presented at ICT.Open, Amersfoort, Netherlands.

### Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

### Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/324391142>

# Integrated Dimensionality Reduction and Sequence Prediction using LSTM

**Poster** · March 2018

DOI: 10.13140/RG.2.2.28577.30563

---

CITATIONS

0

---

READS

52

**2 authors**, including:



**Lambert Schomaker**

University of Groningen

**220** PUBLICATIONS **4,282** CITATIONS

SEE PROFILE

**Some of the authors of this publication are also working on these related projects:**



Making Sense of Illustrated Handwritten Archives [View project](#)



MPS - Medieval Paleographic Scale [View project](#)





# Integrated Dimensionality Reduction and Sequence Prediction using LSTM

Emmanuel Okafor and Lambert Schomaker

Institute of Artificial Intelligence and Cognitive Engineering, University of Groningen, The Netherlands



## Problem


- Most industrial or complex processes present temporal dependencies which stretch over a long time.
- The underlying patterns in these processes can be extremely non-linear.
- Use of linear predictive model (ARMA/ARIMA[1]) is not suitable.
- Hidden Markov Model[2] has prediction limitation when dealing with temporal dependencies that stretch over long durations.

## Objectives


- Use of external and a proposed integrated dimensionality reduction LSTM predictive systems for predicting message logs from industrial machines.
- Conversion of nominal codes (raw codes) to other vectorial paradigms to obtain better correlated patterns.

## Methods

- External Methods: Recurrent Neural Networks (RNN) [3-7]

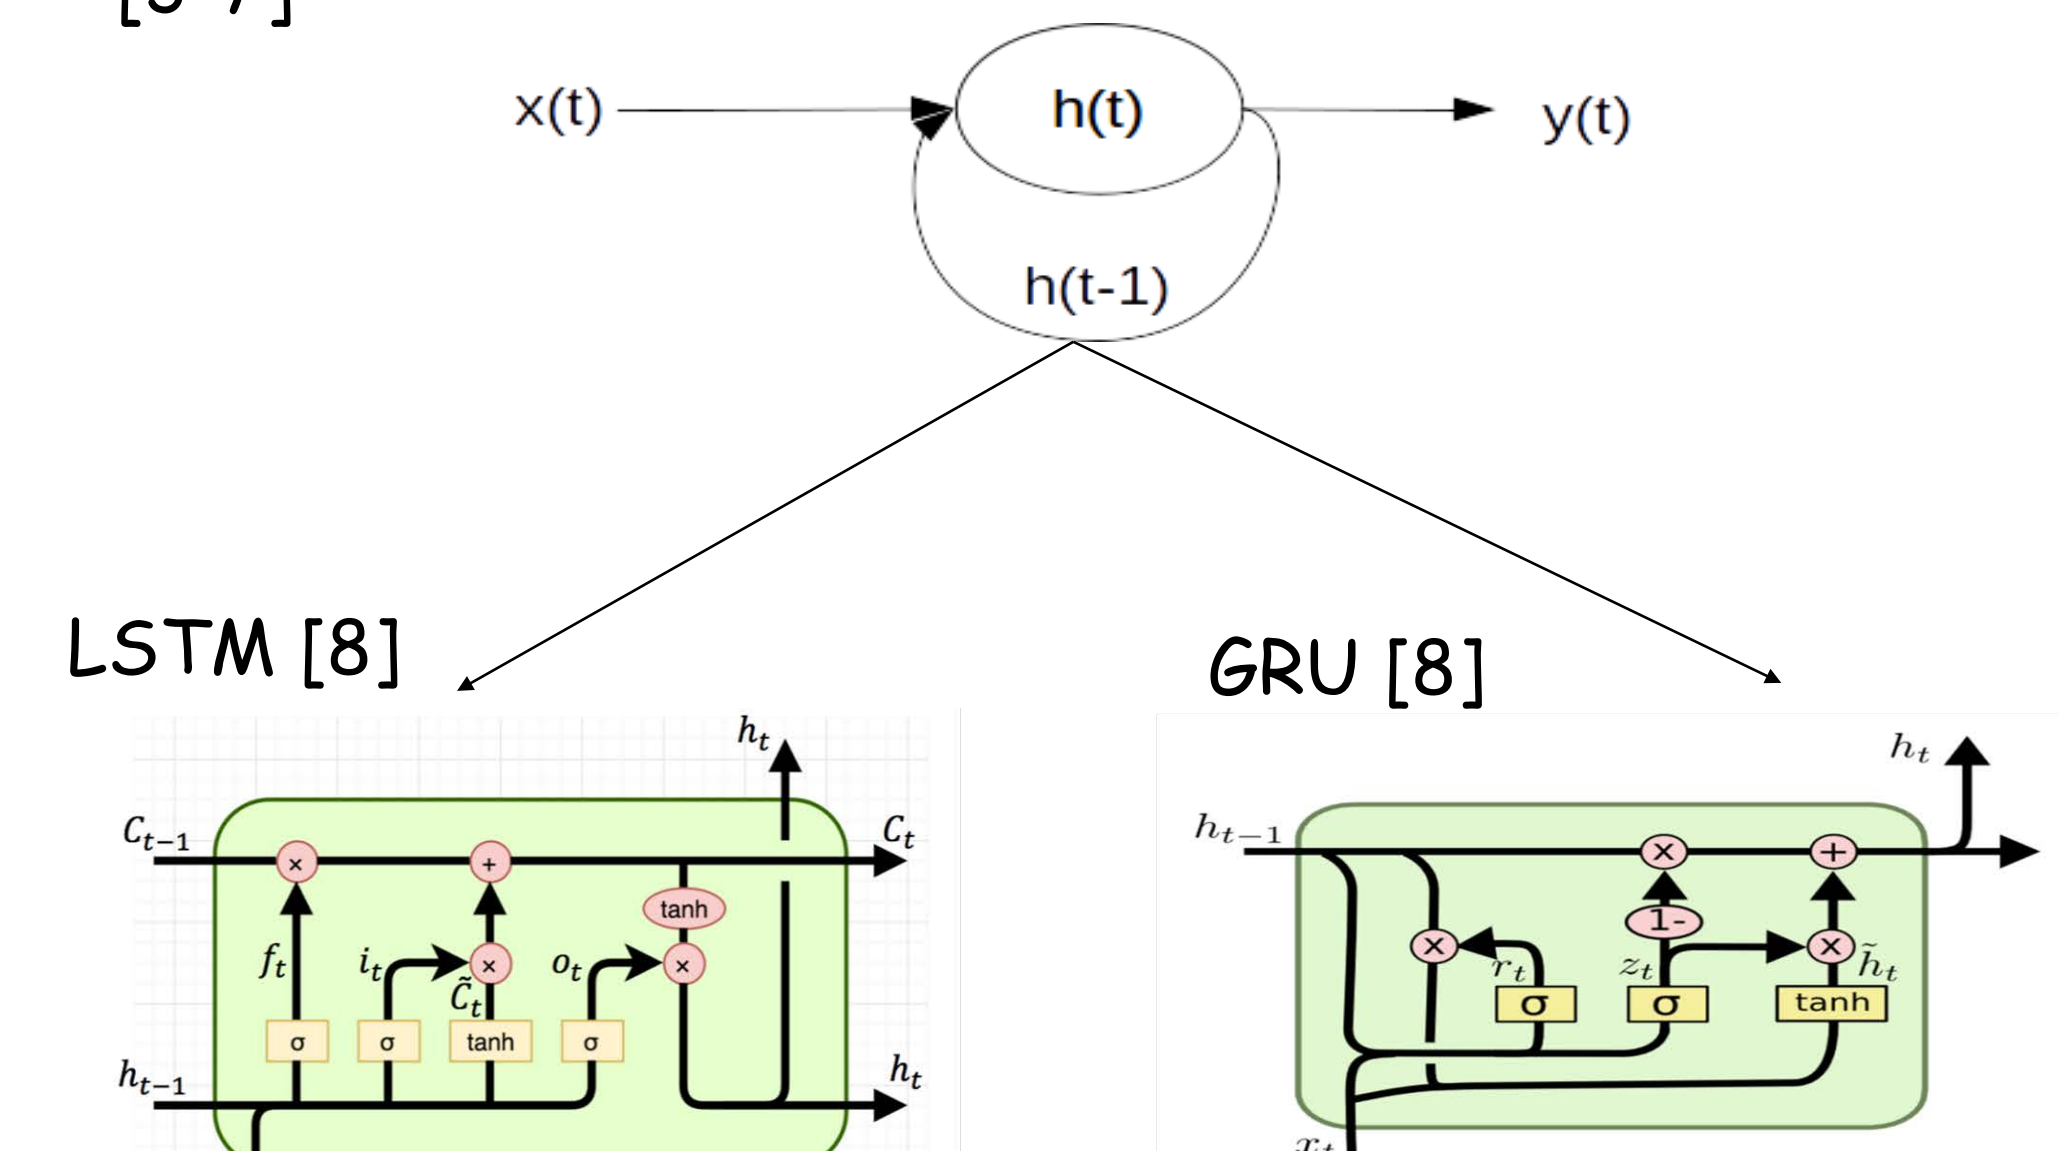

- Proposed Method: Integrated Dimensionality-reduction LSTM

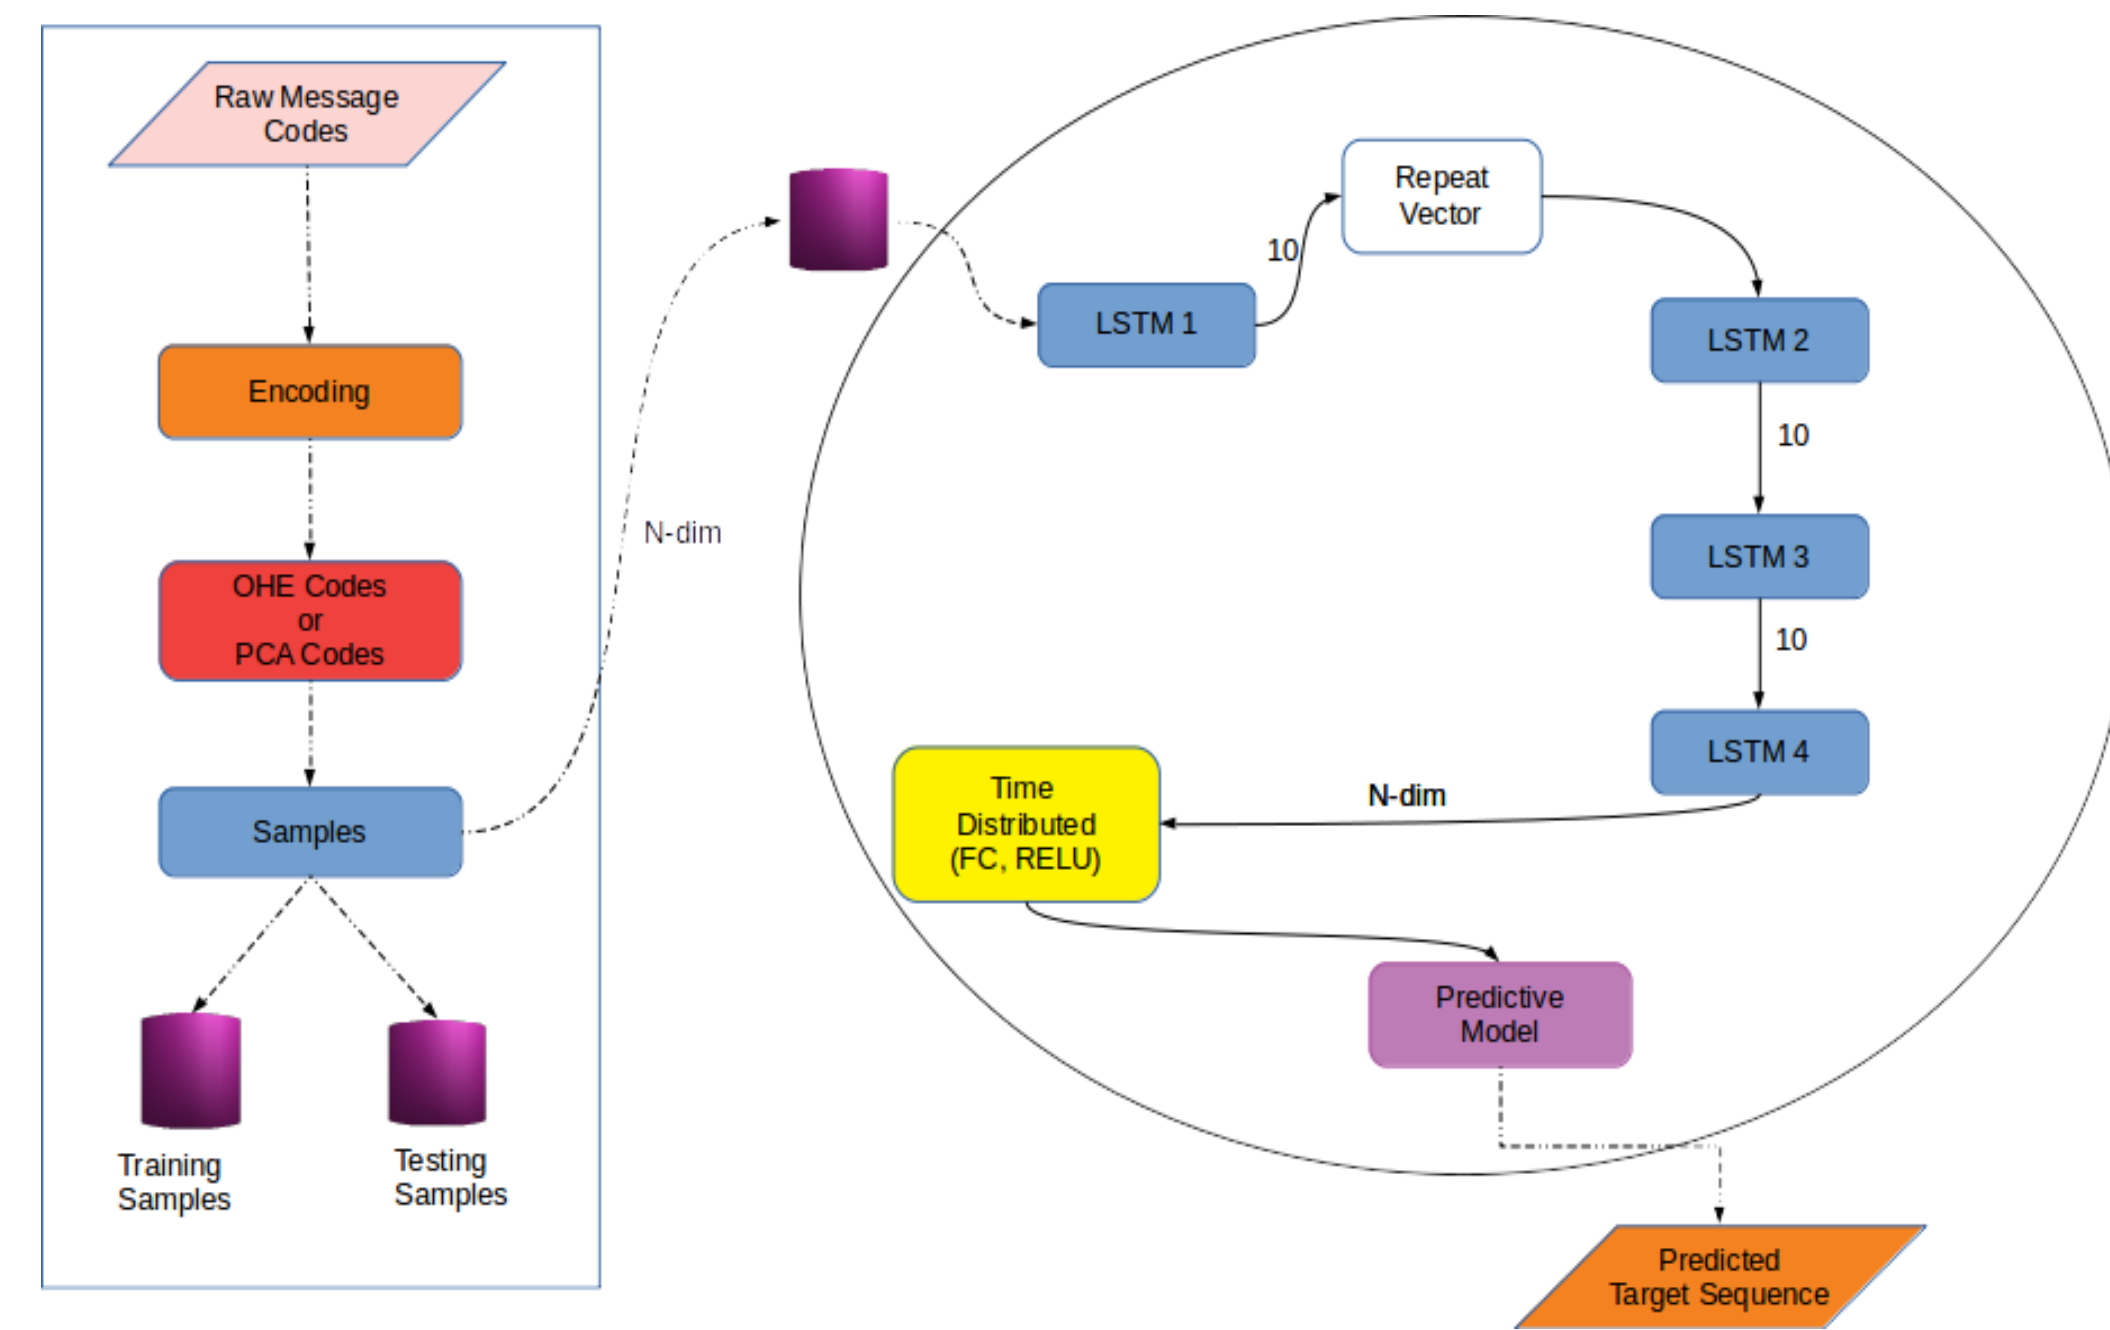

➤ Encoding Section: One LSTM

➤ Decoding Section: Three LSTMs

➤ Repeat Vector: Interlinks the encoding and decoding components


➤ Time Distributed: the final feature dimension from the last LSTM is wrapped with a time-distributed algorithm that presents the reproduced data in a sequential series.

## Data Representations

One-Hot-Encoding Codes															
0	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
9992	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9993	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9994	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9995	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9996	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9997	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9998	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
9999	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

3-DIM Principal Component Analysis (PCA) Codes			
	PC 1	PC 2	PC 3
0	0.8211	-0.1157	-0.0232
1	0.8211	-0.1157	-0.0232
...	...	...	...
9997	0.1326	0.4218	0.4549
9998	0.1326	0.4218	0.4549
9999	0.1326	0.4218	0.4549

Data sizes: ~15.4M total samples

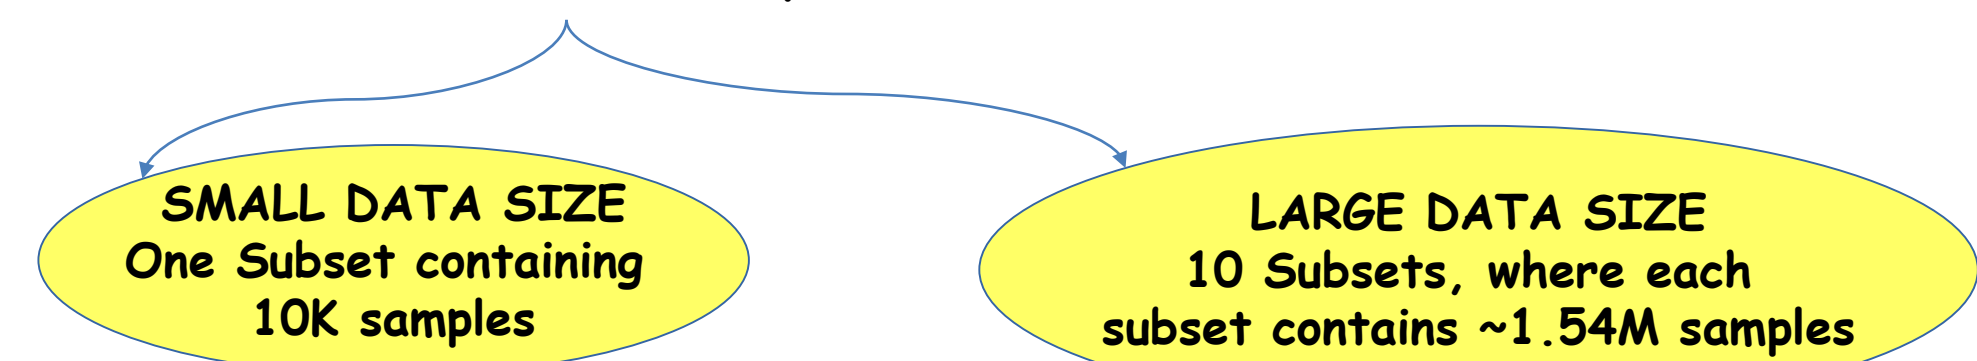

## Results

- ID-LSTM Prediction on OHE codes during training and testing phases (left plot) and index predictions (right plot) over a duration of 10K time-counts.

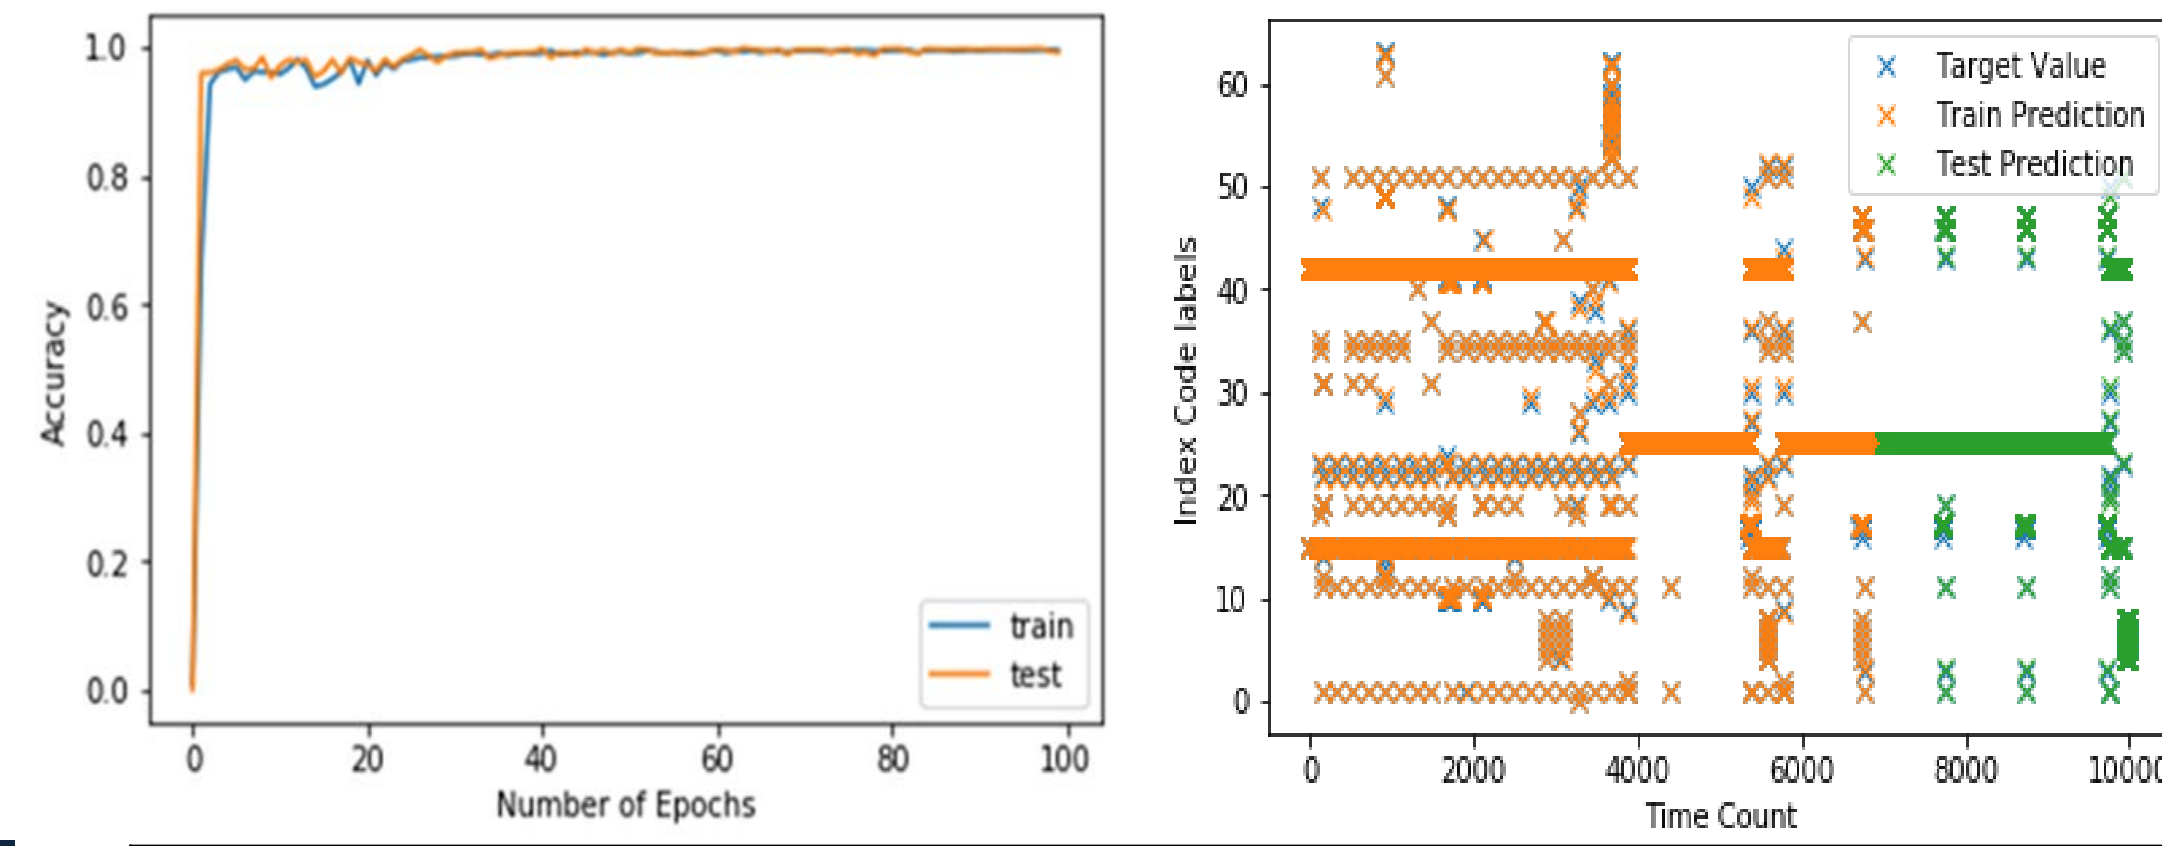



Table 1: Prediction accuracies for the different approaches for 10K Samples

Methods	Train	Test
ID-LSTM-I-OHE-Codes	<b>0.9957</b>	<b>0.9920</b>
ID-LSTM-I-20-DIM-PCA-Codes	0.9763	0.9843
ID-LSTM-I-40-DIM-PCA-Codes	0.9760	0.9733
ID-LSTM-I-10-DIM-PCA-Codes	0.9316	0.9727
ID-LSTM-I-5-DIM-PCA-Codes	0.9139	0.9593
ID-LSTM-I-4-DIM-PCA-Codes	0.9424	0.9410
ID-LSTM-I-3-DIM-PCA-Codes	0.9463	0.9593
ID-LSTM-I-2-DIM-PCA-Codes	0.9424	0.9590
ID-LSTM-I-1-DIM-PCA-Codes	0.8729	0.9340
SL-LSTM-I-1-DIM-PCA-Codes	0.8757	0.9340
SL-GRU-MSE-SI-1-DIM-PCA-Codes	0.8715	0.9316
SL-GRU-MAE-SI-1-DIM-PCA-Codes	0.8715	0.9316
SL-LSTM-MAE-SI-1-DIM-PCA-Codes	0.8715	0.9316
SL-LSTM-MSE-SI-1-DIM-PCA-Codes	0.8715	0.9316
SL-LSTM-I-Raw-Codes	1.429x10-4	0.0000
SL-GRU-MSE-SI-Raw-Codes	2.858x10-4	0.0000
SL-GRU-MAE-SI-Raw-Codes	2.858x10-4	0.0000
SL-LSTM-MSE-SI-Raw-Codes	2.858x10-4	0.0000
SL-LSTM-MAE-SI-Raw-Codes	1.429x10-4	0.0000

### NOTE

- A separate dimensionality reduction by PCA is not needed: the ID-LSTM uses 10 hidden dimensions in the bottleneck layer.
- One-hot-encoding is a must: do not try to predict arbitrary raw integer codes

- ID-LSTM Prediction on OHE codes during training and testing phases (left plot) and index predictions (right plot) over a duration of ~1.54M time-counts for subset 9.

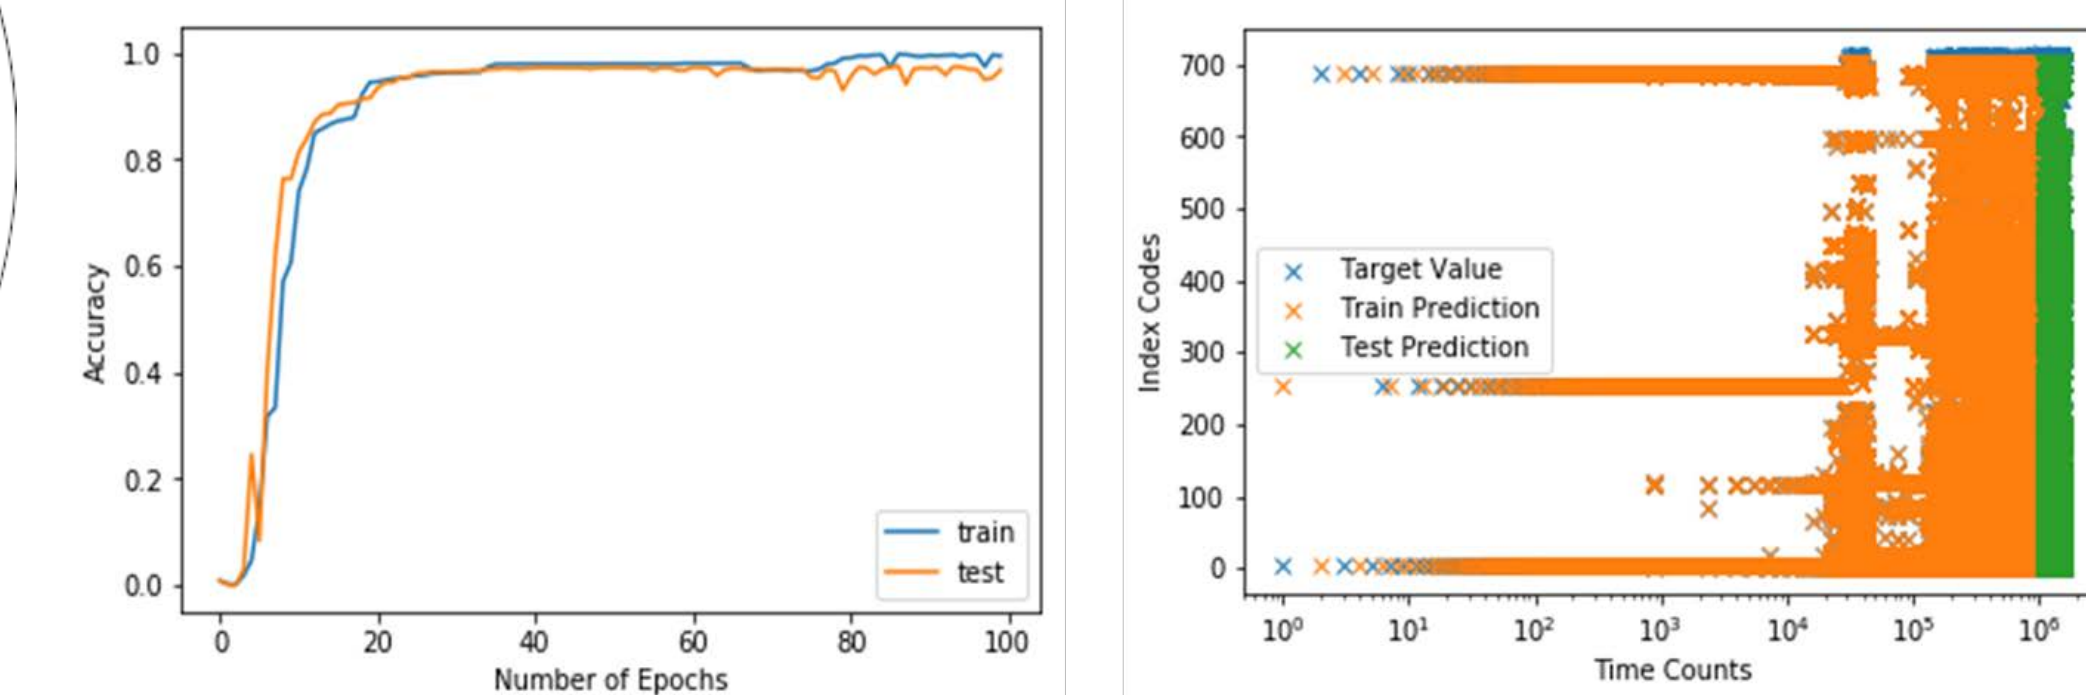

- The left and right plots show the confusion matrix, that is; the plot of the output predictions against their target values for both training and testing phases respectively for subset 9.

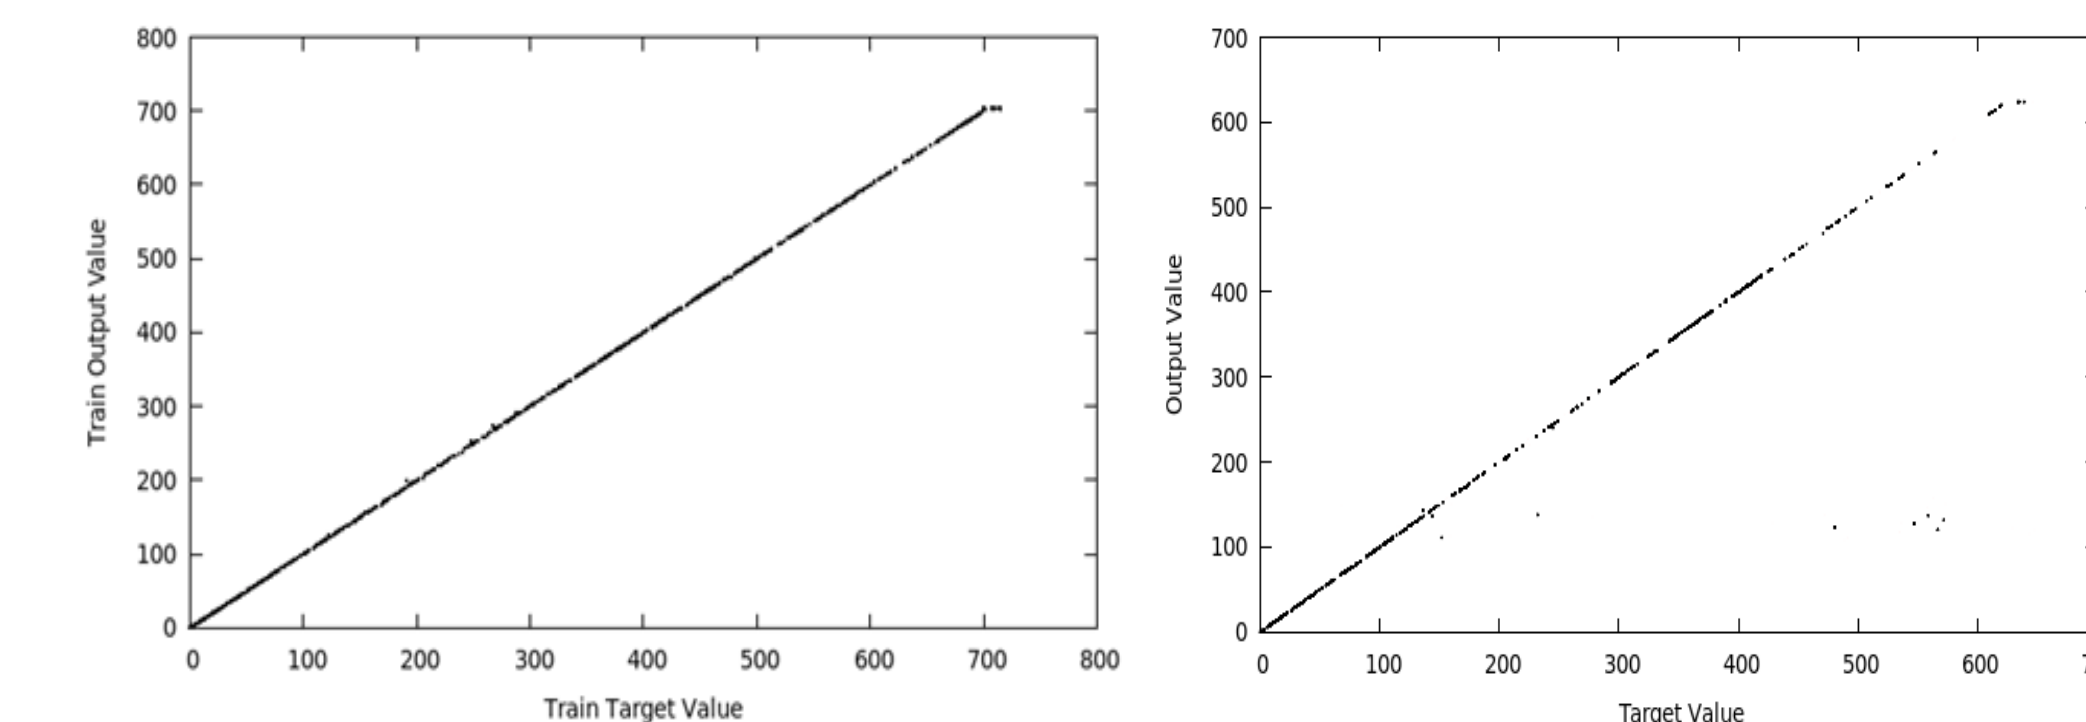


Table 2: Prediction accuracy of the ID-LSTM trained on OHE codes

No of Subsets	Time counts	No. of Index	No. of Machine	Train	Test
Subset 1	0 - 1.54M	948	20	0.9826	0.9751
Subset 2	1.54- 3.09M	606	30	0.9979	0.9695
Subset 3	3.09-4.63M	535	36	0.9886	0.9624
Subset 4	4.63-6.18M	619	48	0.9961	0.9021
Subset 5	6.18-7.73M	620	62	0.9837	0.9806
Subset 6	7.73-9.27M	675	109	0.9962	0.9347
Subset 7	9.27-10.8M	648	64	0.9205	0.9293
Subset 8	10.8-12.3M	679	95	0.9973	0.9576
Subset 9	12.3-13.9M	717	196	0.9943	0.9681
Subset 10	13.9-15.4M	624	263	0.9871	0.9268
<b>Average</b>				<b>0.9844</b>	<b>0.9506</b>

## Conclusion

- We have transformed nominal codes to other vectorial representations with the objective of identifying correlated patterns using one hot encoding (OHE) and principal component analysis (PCA).
- Nominal integer codes are not sensible to use in the RNN.
- A separate dimensionality reduction by PCA is not needed: the ID-LSTM uses 10 hidden dimensions in the bottleneck layer.
- The ID-LSTM on OHE codes yield the best result on a small sample dataset.
- The use of ID-LSTM also obtains good results on reduced dimensional PCA vector codes (20-DIM-PCA)
- The ID-LSTM obtained < 5% error on the predicted OHE codes in a realistically large dataset.
- One-hot-encoding is a must: do not try to predict arbitrary raw integer codes.

## Future Directions

- We suggest that it may be possible to combine the proposed model with an early anomaly detection algorithm,
- To allow continuous prediction of physical problems in the machines generating the message logs.
- Optimization of LSTM-based feature dimensionality reduction in a realistically large dataset.

## References

- [1] G. E. Box and G. M. Jenkins, "Time series analysis, control, and forecasting," San Francisco, CA: Holden Day, vol. 3226, no. 3228, p. 10, 1976.
- [2] Z. Ghahramani, "An introduction to hidden markov models and Bayesian networks," International journal of pattern recognition and artificial intelligence, vol. 15, no. 01, pp. 9-42, 2001.
- [3] A. Graves and N. Jaitly, "Towards end-to-end speech recognition with recurrent neural networks," in International Conference on Machine Learning, 2014, pp. 1764-1772.
- [4] F. A. Gers, D. Eck, and J. Schmidhuber, "Applying lstm to time series predictable through time-window approaches," in Neural Nets WIRN Vietri-01. Springer, 2002, pp. 193-200.
- [5] N. Srivastava, E. Mansimov, and R. Salakhudinov, "Unsupervised learning of video representations using lstms," in International conference on machine learning, 2015, pp. 843-852.
- [6] I. Sutskever, O. Vinyals, and Q. V. Le, "Sequence to sequence learning with neural networks," in Advances in neural information processing systems, 2014, pp. 3104-3112.
- [7] S. Hochreiter and J. Schmidhuber, "Long short-term memory," Neural computation, vol. 9, no. 8, pp. 1735-1780, 1997.
- [8] <http://colah.github.io/posts/2015-08-Understanding-LSTMs/>

This research was supported by the MANTIS

